

Step 1

LOCATE THE OBDII PORT

The OBDII port is located under the dash-board on the drivers side. In some vehicles the port is behind a cover or panel.



Step 2

CONNECT iHAWK LINQ MODULE

Plug the cable into the OBDII port.

TURN THE VEHICLE KEY TO THE RUN POSITION OR START THE VEHICLE




Step 3

ENABLE BLUETOOTH ON DEVICE

Ensure Bluetooth is ON for your iPhone, iPad, or iPod Touch to DISCOVER the iHAWK. It may show "Misc" as the device negotiates, so wait until it shows up as "iHAWK".

(BE PATIENT - This may take up to a MINUTE)

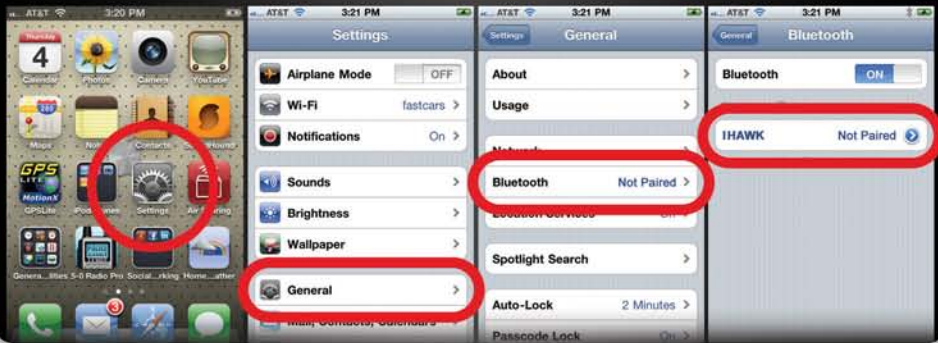

Step 4

PAIR TO iHAWK

Tap the "iHAWK - Not Paired" button to allow iHawk to pair with your device.



Step 5

START THE iHAWK APP

After you have downloaded and installed the App, tap to start.

VERIFY YOU HAVE TWO STEADY BLUE LEDS on the Linq Module BEFORE launching App.



Step 6

NORMAL CONNECTION SEQUENCE (after initial setup)

TURN THE VEHICLE KEY TO THE RUN POSITION OR START THE VEHICLE. Tap the "iHAWK - Not Connected" button to connect.

(VERIFY YOU HAVE TWO STEADY BLUE LEDS on the Linq Module)

Tap the iHawk App icon to start.

